

открытого типа





Внутренняя высота = 45 мм
Шаг = 66 мм
Звеньев в метре = 15 шт
Температурный диапазон -30С + 125С



Тип	внутренний типоразмер (высота и ширина) (mm)	внешний типоразмер (высота и ширина) (mm)	радиус изгиба (mm)	Шаг (mm)
TDG45A.50	45 x 50	68 x 83	75 / 100 125 / 150 175 / 200 250	66
TDG45A.60	45 x 60	68 x 93		66
TDG45A.75	45 x 75	68 x 108		66
TDG45A.100	45 x 100	68 x 133		66
TDG45A.125	45 x 125	68 x 158		66
TDG45A.150	45 x 150	68 x 183		66
TDG45A.175	45 x 175	68 x 208		66
TDG45A.200	45 x 200	68 x 233		66
TDG45A.250	45 x 250	68 x 283		66


ОСНОВНЫЕ РАЗМЕРЫ КОНЦЕВЫХ ЭЛЕМЕНТОВ

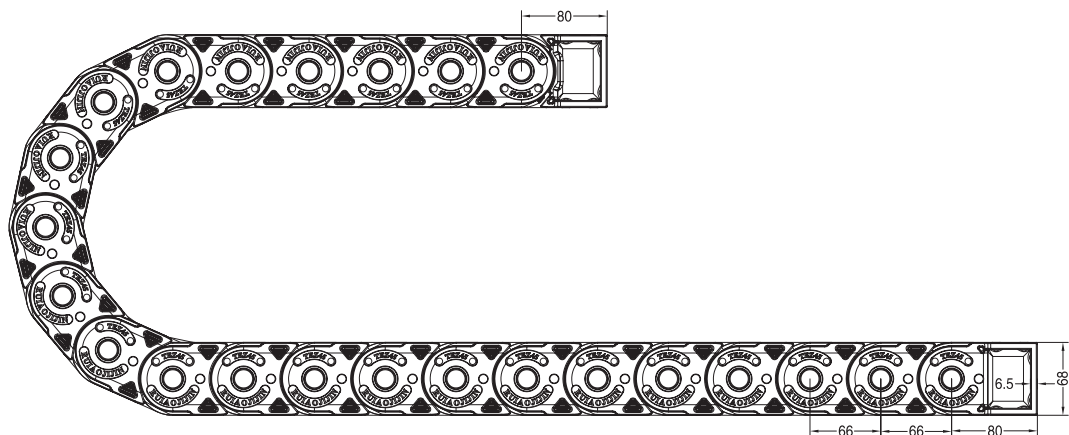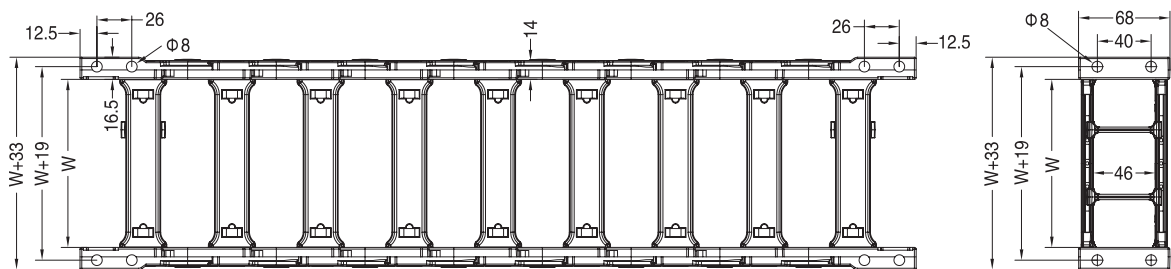




ПЕРЕГОРОДКИ / СИСТЕМЫ ФИКСАЦИИ


L75凸




L100凸

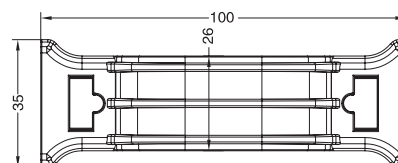


L125凸

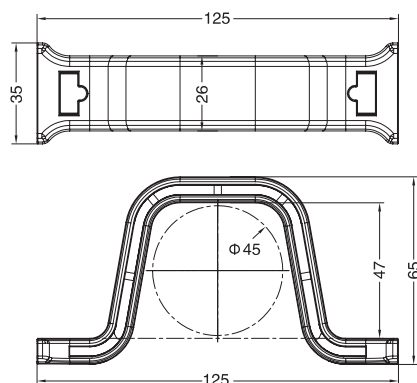

L175凸

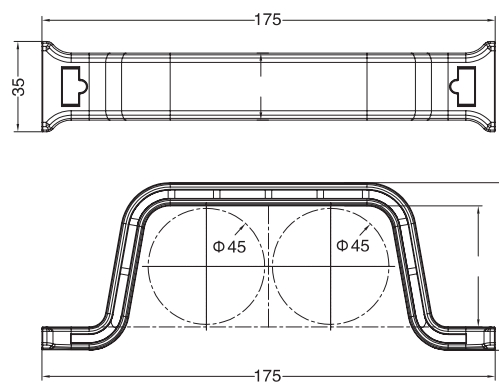

L150凸

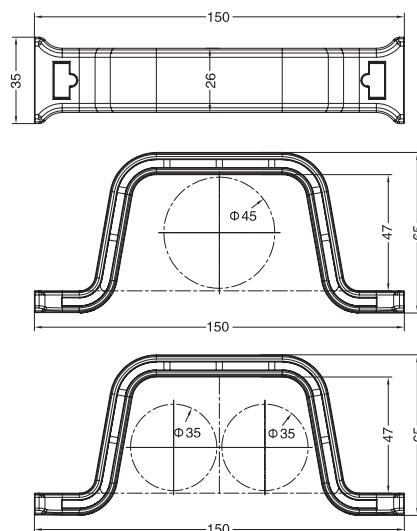

L200凸

