

закрытого типа










Внутренняя высота = 56 мм
Шаг = 90мм
Звеньев в метре = 11 шт
Температурный диапазон - 30С + 125С



Тип	внутренний типоразмер (высота и ширина) (mm)	внешний типоразмер (высота и ширина) (mm)		радиус изгиба (mm)	Шаг (mm)
		стандартная	составная		
TLX56F.100	56 x 100	86 x 140	86 x 140+120...	175 / 200 250 / 300 350 / 400 500	90
TLX56F.125	56 x 125	86 x 165	86 x 165+145...		90
TLX56F.150	56 x 150	86 x 190	86 x 190+170...		90
TLX56F.175	56 x 175	86 x 215	86 x 215+195...		90
TLX56F.200	56 x 200	86 x 240	86 x 240+220...		90
TLX56F.250	56 x 250	86 x 290	86 x 290+270...		90
TLX56F.300	56 x 300	86 x 340	86 x 340+320...		90

ОСНОВНЫЕ РАЗМЕРЫ КОНЦЕВЫХ ЭЛЕМЕНТОВ

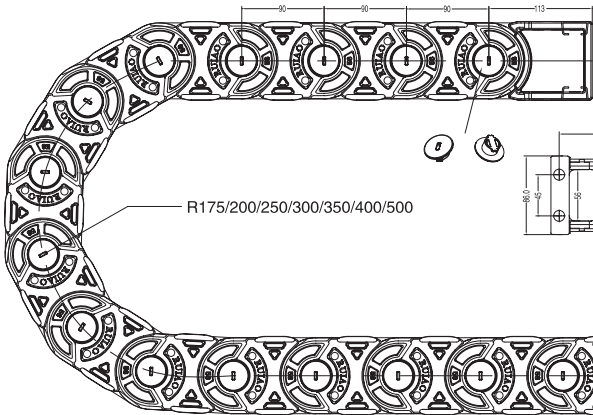

основные
размеры

крепления

общий вид